

DATRON M7



DATRON's milling machine M7 will substantially increase your machining speed and quality. With a floor space of only 1,300 mm x 1,300 mm this compact machine offers a traverse path of 520 mm x 650 mm x 240 mm. The solid Granite construction ensures very dynamic CNC milling, at the same time high surface quality. Robust high-torque machining spindles or precision spindles up to 60,000 rpm are available.

M7

., 📤 🗎


DATRON

High-performance cutting up to 60,000 rpm

- massive machining table with Steel protective cover
- fast 3D rapid prototyping in all conventional materials
- 2D and 3D engraving of Steel and stainless steel
- efficient machining of small-formatAluminium parts
- high-speed machining of frontpanels and housings
- no reworking necessary thanks to neat and burrfree machining

Precise and economical milling, drilling and engraving of:

- Aluminum, drawing, Ureol, Thermoforming, Acrylic-CSF and CFRP parts
- Frontpanels and housings
- 2D and 3D engraving of also Steel and Stainless steel

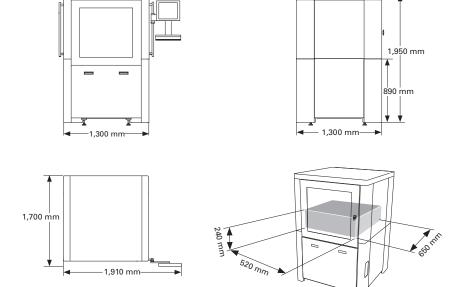

Accessories (optional)

DATRON offers extensive accessories. Check out our accessories catalogue.

- Clamping systems: manual, pneumatic, vacuum
- Automatic tool changer up to 15-fold according to HF-spindle
- Electronic Z-correction with XY-probing
- High-speed milling tools
- CAD/CAM and 3D engraving software

Workspace	
Traverse path (X x Y)	520 mm x 650 mm
Traverse path with tool changer	520 mm x 520 mm
Portal passage	200 mm
Z-Stroke	240 mm
Machine dimensions	
Machine table	Massive Granite table on a Steel frame structure with double-portal Y-drive
Installation dimensions with control unit (W \times D \times H)	1,910 mm x 1,700 mm x 1,950 mm
Installation dimensions without control unit (W \times D \times H)	1,300 mm x 1,300 mm x 1,950 mm
Max. table load	120 kg
Weight	c. 800 kg
Speeds	
Positioning feed	X = 16 m/min Y = 16 m/min Z = 8 m/min
Supply	
Voltage	230 V up to 2.0 kW spindle 3 x 400 V from 3.0 kW spindle
Power input	up to 3.0 kW with spindles < 2.0 kW, 4.0 kW with spindles > 2.0 kW
Air connection	7 - 10 bar, dry, clean, oil-free
Ambient temperature	15 - 30°C
Protection cabin	✓
CNC-control for 3-6 axes	✓
17" LCD operator terminal	✓
Hand-held control unit	✓
USB Interface	✓
Ethernet Interface	✓
Tool changer (optional)	maximum 15-fold
HF-spindles (optional)	from 0.6 kW (6,500 - 60,000 rpm) up to 3.0 kW (1,000 - 40,000 rpm)

Drive System

Digital servo drives

Control

Fast digital servo control with Microsoft ® Windows ® control software

Lubrication and cooling

Minimal quantity lubrication, electronically dosed

Milling machine M7

CAD-Interface (optional)

- DIN 66025 (G-Code)
- Excellon
- HPGL
- CL-Print (each optional)

0A01191A